




STIMSONITE®

The World's Most Recognized Manufacturer of Reflective Pavement Markers

The First, and Original "Stimsonite" Model 88/C88

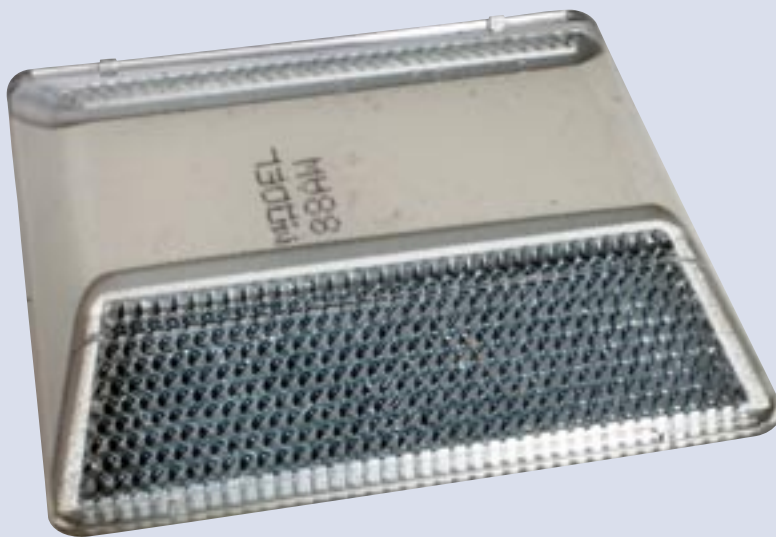

88 The Marker that set the Industry Standards Worldwide more than 40 Years Ago

C88 The C88 has a lens coating to protect against abrasion

Specifications: **Dimensions (cm):**
10 x 10 x 1.8

Slope of Reflecting Face: 30°

Reflective Area:
21.0 cm²

- Manufactured according to Norm ASTM D-4280.
- Surpasses all requirements of ASTM D-4280.
- Approved by Highway Authorities around the World.



STIMSONITE®

The World's Most Recognized Manufacturer of Reflective Pavement Markers

Technical Information Model 88/C88

ASTM-D 4280 requires a newly installed White Marker to have 279 mcd/lux at 0.2 Obs. Angle and 0 Entrance Angle. The Stimsonite Model 88 exceeds that requirement in all colors.

ASTM-D-4280 requires a minimum of 2,000 lbs compression test. The Stimsonite Model 88 exceeds that requirement.

Adhesives Recommended

- Bitumen for asphalt
- Flexible or "tropical" bitumen for hot climates
- Epoxy for concrete.

Product Codes for Marker 88/C88

88/C88 "A" – Bi-Directional

AY = Yellow/Yellow; AW = White/White; AR = Red/Red; AB = Blue/Blue; AG = Green/Green.

88/C88 "B" – Mono-Directional

BY = Yellow; BW = White; BR = Red; BB = Blue; BG = Green.

88/C88 "E" – Bi-Directional – Two Colors

ERW = Red/White; ERY = Red /Yellow; EYW = Yellow/White.

Shipping:

1 box = 100 markers

1 pallet (L40" x W35" x H29") = 24 boxes, or 2,400 markers

1–20' Container = 34 pallets, or 81,600 markers.

Distributor: