




STIMSONITE®

The World's Most Recognized Manufacturer of Reflective Pavement Markers

“Stimsonite” Model 948

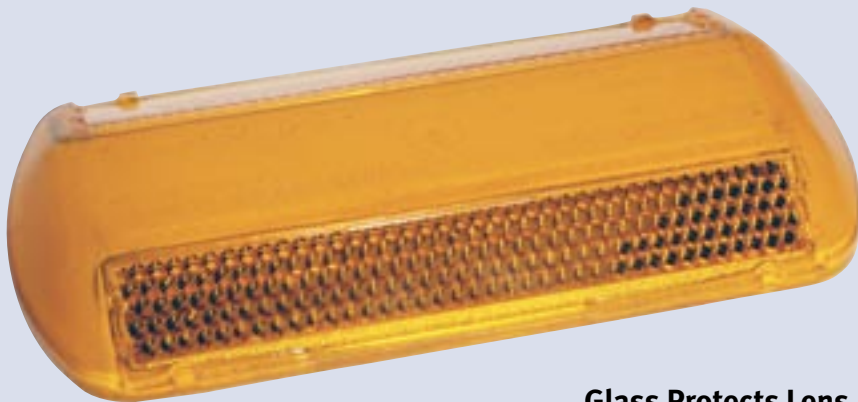

Glass Protects Lens
Against Abrasion

Specifications: **Low Profile**
Dimensions (cm):
11.9 x 5.8 x 1.3
Slope of Reflecting
Face: 30°
Reflective Area:
12 cm²

- Manufactured according to Norm ASTM D-4280
Surpasses all requirements of ASTM D-4280
- BSI certified to be Compliant with EN-1463
Rated S1 and R1 according to BS en-1463-2:2000
- Also approved by Highway Authorities in: UK, France,
Spain, Hungary, Czech Republic, Poland, USA, and
others.



STIMSONITE®

The World's Most Recognized Manufacturer of Reflective Pavement Markers

Technical Information Model 948

The Model 948 was classified as S1 and R1 in accordance with BS EN-1463-2:2000.

Coefficient of retroreflection measured at an observation angle of 0.3° and an entrance angle of ± 5°.

Mean achieved: 261 mcd/lux minimum requirement 150 mcd/lux.

Adhesives Recommended

- Bitumen for asphalt
- Flexible or "tropical" bitumen for hot climates
- Epoxy for concrete.

Product Codes for Marker 948

• 948 "A" – Bi-Directional

AY = Yellow/Yellow; AW = White/White
AR = Red/Red; AB = Blue/Blue; AG = Green/Green.

• 948 "B" – Mono-Directional

BY = Yellow; BW = White; BR = Red; BB = Blue;
BG = Green.

• 948 "E" – Bi-Directional – Two Colors

ERW = Red/White; ERY = Red/Yellow;
EYW = Yellow/White.

Shipping

1 box = 100 markers

1 pallet (L40" x W35" x H29") = 48 boxes, or 4,800 markers

1 – 20' Container = 34 pallets, or 163,200 Markers.

Distributor: